

## Programming display

### Main functions

Entering of access password  
Closing speed adjustment  
Pause times adjustment  
Diagnostic display

Opening speed adjustment  
Anti break-in function management  
Anti-crushing adjustment  
Weekly calendar management

Management of interlock with or without memory  
Selection of battery operation logics  
Configuration of 1 output on the control unit  
Configuration of 2 emergency inputs on the control unit  
Display of number of cycles carried out  
Management of 5 daily time slots



Programming display

## SD KEEPER functions keyboard

### Main functions

Manual  
Automatic  
One way  
Reset

Open  
Partial opening  
Night  
One way, partial

Troubleshooting through a combination of flashing LEDs  
Operation can be disabled by a jumper or a combination of keys  
Preset for programming display



SD Keeper functions keyboard

## SDK light

### Available programs

Manual  
Automatic  
One way  
Reset


Open  
Partial opening  
Night

Troubleshooting through a combination of flashing LEDs  
Operation can be disabled by a combination of keys  
Not preset for programming display



SDK light functions keyboard

## Small section profile TK20

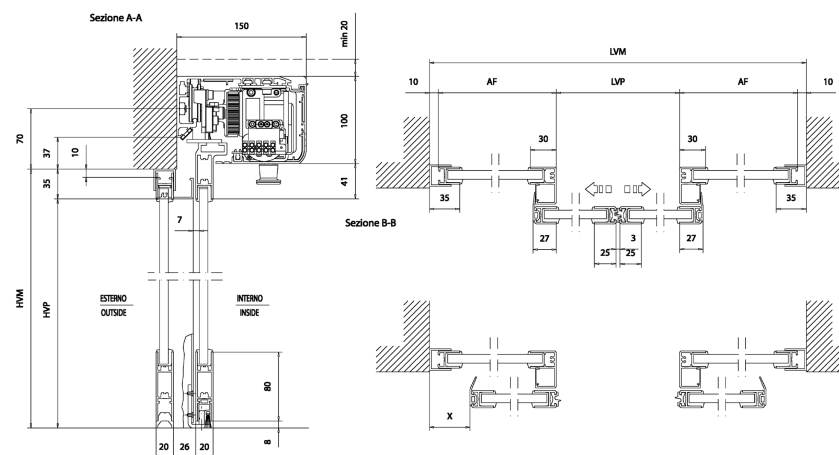

### HEADQUARTERS

#### ITALY

FAAC SpA  
Via Calari 10 - 40069 Zola Predosa (BO)  
Tel. +39 051 61724 - Fax +39 051 758518  
it.info@faacgroup.com - www.faacgroup.com

### SUBSIDIARIES

#### AUSTRALIA

FAAC AUSTRALIA PTY LTD  
Homebush - Sydney, Australia  
tel. +61 2 87565644  
fax +61 2 87565677  
www.faac.com.au

#### AUSTRIA

FAAC GMBH  
Salzburg, Austria  
tel. +43 662 8533950  
fax +43 662 85339525  
www.faac.at

FAAC TUBULAR MOTORS  
tel. +49 30 56796645  
fax +49 30 22409006  
faactm.info@faacgroup.com  
www.faac.at

#### BENELUX

FAAC BENELUX NV/SA  
Brugge, Belgium  
tel. +32 50 320202  
fax +32 50 320242  
www.faacbenelux.com

FAAC TUBULAR MOTORS  
Schaapweg 30  
NL-6063 BA Vlodrop, Netherlands  
tel. +31 475 406014  
fax +31 475 406018  
faactm.info@faacgroup.com  
www.faacbenelux.com

#### CHINA

FAAC SHANGHAI  
Shanghai, China  
tel. +86 21 68182970  
fax +86 21 68182968  
www.faacgroup.cn

#### FRANCE

FAAC FRANCE  
Saint Priest - Lyon, France  
tel. +33 4 72218700  
fax +33 4 72218701  
www.faac.fr

FAAC FRANCE - AGENCE PARIS  
Massy - Paris, France  
tel. +33 1 69191620  
fax +33 1 69191621  
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOILETS  
Saint Denis de Pile - Bordeaux, France  
tel. +33 5 57551890  
fax +33 5 57742970  
www.faac.fr

#### GERMANY

FAAC GMBH  
Freilassing, Germany  
tel. +49 8654 49810  
fax +49 8654 498125  
www.faac.de

FAAC TUBULAR MOTORS  
tel. +49 30 56796645  
fax +49 30 22409006  
faactm.info@faacgroup.com  
www.faac.de

#### INDIA

FAAC INDIA PVT. LTD  
Noida - Delhi, India  
tel. +91 120 3934100/4199  
fax +91 120 4212132  
www.faacindia.com

#### IRELAND

NATIONAL AUTOMATION LTD  
Co. Roscommon, Ireland  
tel. +353 71 9663893  
fax: +353 71 9663890  
www.nal.ie

#### MIDDLE EAST

FAAC MIDDLE EAST FZE  
Dubai Silicon Oasis Operation Center - Dubai, UAE  
tel. + 971 4 3724190  
fax+ 971 4 3724191  
www.faac.ae

#### NETHERLANDS

KEMKO BV  
Doetinchem, Netherlands  
tel. +31 314 378777  
fax +31 314 362224  
www.kemko.nl

#### NORDIC REGIONS

FAAC NORDIC AB  
Perstorp, Sweden  
tel. +46 435 779500  
fax +46 435 779529  
www.faac.se

#### POLAND

FAAC POLSKA SP.ZO.O  
Warszawa, Poland  
tel. +48 22 8141422  
fax +48 22 8142024  
www.faac.pl

#### RUSSIA

FAAC RUSSIA  
Moscow, Russia  
tel. +7 (495) 646 24 29  
www.faac.ru

#### SPAIN

CLEM, S.A.U.  
San Sebastián de los Reyes - Madrid, Spain  
tel. +34 91 3581110  
fax +34 91 7293309  
www.faac.es

#### SWITZERLAND

FAAC AG  
Altdorf, Switzerland  
tel. +41 41 8713440  
fax + 41 41 8713484  
www.faac.ch

#### TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ  
SAN. VE TİC. LTD. SİRTEKİ  
İstanbul, Turkey  
tel.+90 (0)212 - 3431311  
www.faac.com.tr

#### UNITED KINGDOM

FAAC UK LTD.  
Basingstoke - Hampshire, UK  
tel. +44 1256 318100  
fax +44 1256 318101  
www.faac.co.uk

#### U.S.A.

FAAC INTERNATIONAL INC  
Fullerton, California - U.S.A.  
tel. +1 714 446 9800  
fax +1 714 446 9898  
www.faacusa.com



# A100 COMPACT

## Automations for sliding doors



Automations for sliding doors

single leaf, two leaves with continuous duty

Thin and elegant

Thanks to their compact dimensions, FAAC A100 COMPACT automations can be adapted to every type of architectural environment, even in limited space conditions. All the most innovative technical features in just a few centimetres. For the outmost versatility of use, the A100 COMPACT Series can be adapted to sliding doors with single leaves and a maximum weight of 110 kg or with double leaves and a maximum weight of 70 kg each leaf. An A100 COMPACT automation also guarantees considerable energy savings as regards air-conditioning and the total removal of architectural barriers.

Reliable and always sliding

Designed to operate at best on each occasion and in every environment, A100 COMPACT automations are automatically reliable, without limits on the frequency of use. In the event of a power cut, buffer batteries (optional) with charge control guarantee 100% operation for thirty minutes.


Excellent logics in real time

A microprocessor verifies in real time all door activities and guarantees an intelligent control. The operation logics can be selected by means of a functions keypad.


Absolute safety

The A100 COMPACT Series automatically programs opening and closing force and speed according to the friction and the door weight in conformity with the relevant international safety standards. In case of an obstacle the door reopens immediately. On the next closing it verifies at slow speed if the obstacle is still present.

thinner than ever

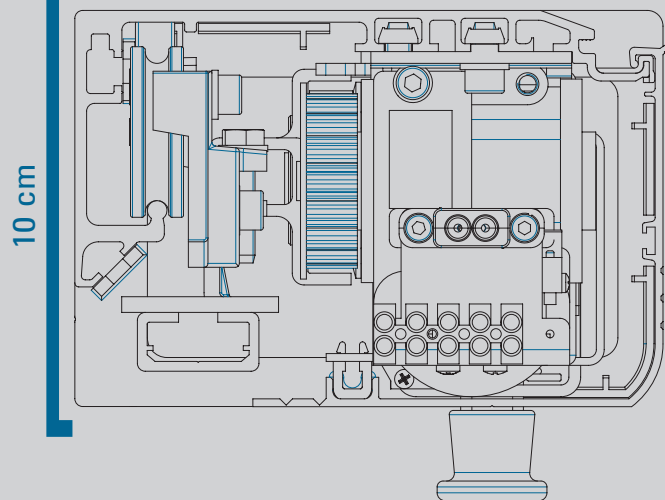

1 Motor with electrical lock

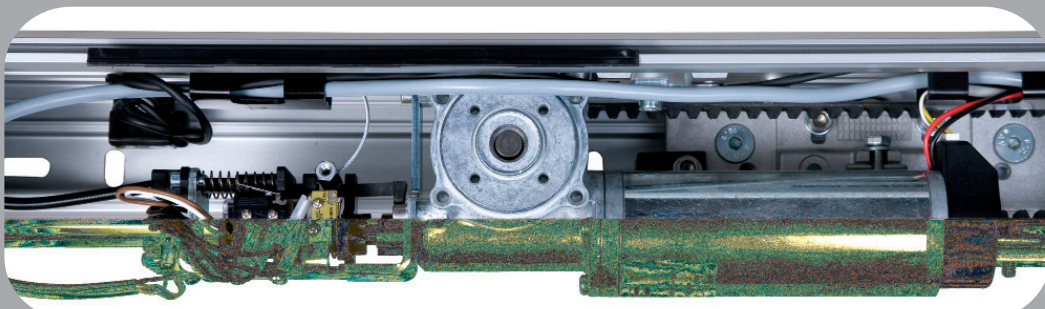

3 Drive trolleys




- 1 Motor with electrical lock
- 2 Control unit with switching power supply unit
- 3 Drive trolleys
- 4 Knob for manual release
- 5 "Parachute" device of front housing
- 6 Eyelets for a fast mechanical installation

Accessories

Round photocell  
Infra-red passive sensor  
Microwave radar  
Keyswitches with emergency release devices  
Profiles for glass leaf fitting  
Electro-mechanical motor lock with manual release  
Motor lock monitoring  
**Emergency batteries. They guarantee the automated system to operate for 30 minutes on continuous use**  
**Break-out anti-panic kit**  
**Compatible with the new series of FAAC TK20 and TK50 profiles**


2 Control unit

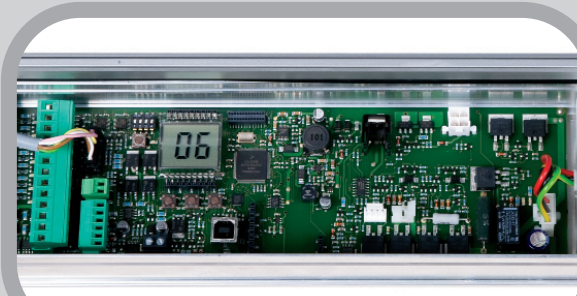

Time slot programmable  
calendar management



4 Knob for manual release

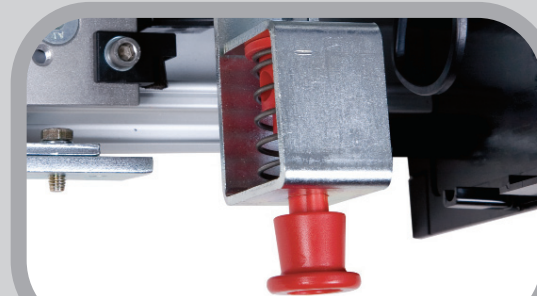

Technical specifications

A100 Compact

Electric power supply	115/230 V ac - 50 (60) Hz
Power consumption	100 W
Frequency of use	100%
Drive unit	24 V dc motor with encoder
Head profile length	VP x 2 + 100 mm
Load free opening adjustment	5 ÷ 70 cm/s
Load free closing adjustment	5 ÷ 70 cm/s
Partial opening adjustment	10% ÷ 90% of total opening
Pause time adjustment	0 ÷ 30 s
Night pause time adjustment	0 ÷ 240 s
Anti-crushing device	standard
Photocells fail-safe	standard (can be excluded)
Protection class	IP 23 (for indoor use only)
Environmental temperature	-20°C ÷ +55°C

Use

Model	Leaf	Free passage width (mm)	Leaf max. weight (kg)
A100 COMPACT 1	single	700÷3000	110
A100 COMPACT 2	double	800÷3000	70+70